




Cineroid[®] 23

PRODUCT CATALOG
1ST EDITION

*ROLLABLE LIGHT / FLEXIBLE LIGHT / STUDIO LIGHT /
COMPACT STUDIO LIGHT / CREATOR LIGHT / DMX BRIDGE /
DONGLE FOR APP / ACCESSORIES*

www.cineroid.com

Cineroid LED Light Naming Rule

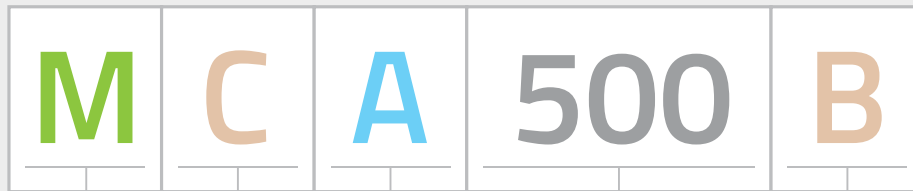

R Rollable	B Bi-Color	A Square	1000 W	V V-battery mount
F Flexible	C Full Color	B Rectangular	500 W	B Barndoor
M Metal		C Wide	250 W	S Softbox
			120 W	
			-	

EX) Rollable, Full Color, Square, 1000 W : RCA1000
 Flexible, Full Color, Rectangular, 120W, V-battery mount : FCB120V

LED LIGHT



1kW	RCA1000	4
500W	RCC500	5
250W	RCA250	6
120W	RCB120	7



250W	FCA250V	8
250W	FCC250V	10
120W	FCB120V	12



1kW	MCB1000B	14
500W	MCA500B	16
400W	MCB400B	18

LED LIGHT

Creator Light	120W	TL120	19
---------------	------	-------	----

Compact Studio Light	240W	LS1600i	20
	120W	LS800i	21

STUDIO SOLUTION

DMX Bridge	DB001U	22
	Uni Software	23

App 'GraV' and dongle for wireless control	DG-001	24
--	--------	----

ACCESSOIRES

JUPITER1000

FULL COLOR ROLLABLE LED LIGHT **1000W**

Highlights

- 1000W ultra powerful lighting
- RGB full color with white color LED light
- Rollable LED Light Panel
- 0~100% dimming / Flicker-Free
- CRI 95 / TLCI 98 or above
- Color temperature 2,700°K~6,500°K
- DMX 512 ready with Built-in DMX
- Custom effect / 6 Preset reserve
- USB 5V output / USB Firmware update
- New panel mechanism for easy repair
- Controllable via a smart device

1KW
ULTRA POWER



Model & Kit Component

○ RCA1000

LED Panel	<PN-RCA1000>	1000W Rollable LED Light Panel
Controller	<CC1000>	Controller for Jupiter 1000W
Bracket	<YAS036>	X Bracket for Jupiter 1000W
Ball Head	<BL-LM1600S>	Quick mount ball head with spigot
Cable	<C5003>	3m extension cable for for 500W/1KW
Soft Box	<SB-RCA1000>	Softbox for Jupiter 1000W

Specifications



Light Sources	RGBWW Rollable LED Panel
Consumption	1000 W
Photometric (lux)	1m:24,000 2m:7,168 3m:3,500
CRI	95 or above
CCT	2700°K ~ 6500°K
Light Angle	140°
Dimming	0~100%
Power Input	110 / 240 V
DMX	512 Channels
Dimensions	Panel: 120x120 cm (47.2x47.2 inch) Controller: 27x17x8 cm (10.5x6.5x3 inch)
Weight	Panel: 1.9 kg (4.2 lb) Controller: 2.0 kg (4.4 lb)

JUPITER 500

FULL COLOR ROLLABLE LED LIGHT **500 W**

Highlights

- 500W ultra powerful lighting
- RGB full color with white color LED light
- Rollable LED Light Panel
- 0~100% dimming / Flicker-Free
- CRI 95 / TLCI 98 or above
- Color temperature 2,700°K~6,500°K
- DMX 512 ready with Built-in DMX
- Custom effect / 6 Preset reserve
- USB 5V output / USB Firmware update
- New panel mechanism for easy repair
- Controllable via a smart device

500W
ULTRA POWER



Model & Kit Component

○ RCC500

LED Panel	<PN-RCC500>	500W Rollable LED Light Panel
Controller	<CC500>	Controller for Jupiter 500W
Bracket	<YAS035>	X Bracket for Jupiter 500W
Ball Head	<BL-LM1600S>	Quick mount ball head with spigot
Cable	<C5003>	3m extension cable for for 500W/1KW
Soft Box	<SB-RCC500>	Softbox for Jupiter 500W

Specifications



Light Sources	RGBWW Rollable LED Panel
Consumption	500 W
Photometric (lux)	1m:12,000 2m:3,584 3m:1,750
CRI	95 or above
CCT	2700°K ~ 6500°K
Light Angle	140°
Dimming	0~100%
Power Input	110 /240 V
DMX	512 Channels
Dimensions	Panel: 120x63 cm (46.9x24.8 inch) Controller: 16x9x28 cm (6.3x3.5x11 inch)
Weight	Panel: 0.9 kg (2.0 lb) Controller: 1.8 kg (4 lb)

JUPITER250

FULL COLOR ROLLABLE LED LIGHT **250 W**

Highlights

- RGB full color with white color LED light
- Rollable LED Light Panel
- 0~100% dimming
- Flicker-Free
- CRI 95 / TLCI 98 or above
- Color temperature 2,700°K~6,500°K
- DMX 512 ready with Built-in DMX
- Custom effect / 6 Preset reserve
- USB 5V output / USB Firmware update
- New panel mechanism for easy repair
- **Controllable via a smart device**



Model & Kit Component

○ RCA250

LED Panel	<PN-RCA250>	250W Square Rollable LED Light Panel
Controller	<CC250V>	Controller for Jupiter250W
Bracket	<YAS034>	X Bracket for Jupiter250W square panel
Cable	<C2503>	3m extension cable for Jupiter250W
Soft Box	<SB-FCA250>	Softbox for Saturn Jupitersquare panel
Adapter	<AC300X>	Adapter for Jupiter250W

Specifications



Light Sources	RGBWW Rollable LED Panel
Consumption	250 W
Photometric (lux)	1m:6,024 2m:1,752 3m:875
CRI	95 or above
CCT	2700°K ~ 6500°K
Light Angle	140°
Dimming	0~100%
Power Input	DC 24 V
DMX	512 Channels
Dimensions	Panel: 46x46 cm (18.1x18.1 inch) Controller: 27x17x8 cm (10.5x6.5x3 inch)
Weight	Panel: 0.45 kg (1.0 lb) Controller: 1.8 kg (4 lb)

JUPITER120

FULL COLOR ROLLABLE LED LIGHT **120W**

Highlights

- RGB full color with white color LED light
- Rollable LED Light Panel
- 0~100% dimming
- Flicker-Free
- CRI 95 / TLCI 98 or above
- Color temperature 2,700°K~6,500°K
- DMX 512 ready with Built-in DMX
- Custom effect / 6 Preset reserve
- USB 5V output / USB Firmware update
- New panel mechanism for easy repair
- Controllable via a smart device



Model & Kit Component

○ RCB120

LED Panel	<PN-RCB120>	120W Rollable LED Light Panel
Controller	<CC120V>	Controller for Jupiter120W
Bracket	<YAS026>	X Bracket for Jupiter120W
Cable	<C1203>	3m extension cable for Jupiter120W
Soft Diffuser	<LD-FCB120>	Softbox for Jupiter 120W panel
AC Adapter	<AC150M>	Adapter for Jupiter 120W

Specifications



Light Sources	RGBWW Rollable LED Panel
Consumption	120 W
Photometric (lux)	1m:2,806 2m:829 3m:381
CRI	95 or above
CCT	2700°K ~ 6500°K
Light Angle	140°
Dimming	0~100%
DC Input	12~24 V
DMX	512 Channels
Dimensions	Panel: 46x24 cm (18.1x9.5 inch) Controller: 18x9x6 cm (7x3.5x2.4 inch)
Weight	Panel: 0.3 kg (0.7 lb) Controller: 0.6 kg (1.4 lb)

FLEXIBLE
LED LIGHT



RGBWW full color with white



Controller with built-in double battery mount



Durable soft box

New 250W Controller


SATURN250 Square

FULL COLOR FLEXIBLE LED LIGHT

250 W

Highlights

- RGB full color with white color LED light
- Enhanced flexible LED Panel
- 250W powerful lighting
- Flicker-Free
- CRI 95 / TLCI 98 or above
- 0~100% dimming
- Color temperature 2,700°K~6,500°K
- DMX 512 ready with Built-in DMX
- Custom effect / 6 Preset reserve
- USB 5V output / USB Firmware update
- 14.4V and 26V multi support for V mount battery

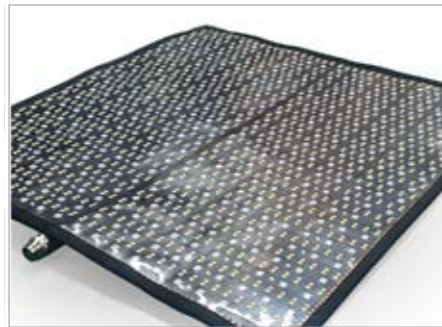

Model & Kit Component

○ FCA250V		
LED Panel	<PN-FCA250>	250W Square Flexible LED Light Panel
Controller	<CC250V>	Controller for Saturn 250W
Bracket	<YAS034>	X Bracket for Saturn 250W square panel
Cable	<C2503>	3m extension cable for Saturn 250W
Soft Box	<SB-FCA250>	Softbox for Saturn 250W square panel
Adapter	<AC300X>	Adapter for Saturn 250W

Specifications



Light Sources	RGBWW Flexible LED Panel
Consumption	250 W
Photometric (lux)	1m:6,024 2m:1,752 3m:875
CRI	95 or above
CCT	2700°K ~ 6500°K
Light Angle	140°
Dimming	0~100%
Power Input	DC 24 V
DMX	512 Channels
Dimensions	Panel: 46x46 cm (18.1x18.1 inch) Controller: 27x17x8 cm (10.5x6.5x3 inch)
Weight	Panel: 0.45 kg (1.0 lb) Controller: 1.8 kg (4 lb)

FLEXIBLE
LED LIGHT



RGBWW full color with white



Bracket for quick installation



Durable soft box

New 250W Controller

SATURN250 Wide

FULL COLOR FLEXIBLE LED LIGHT

250W

Highlights

- RGB full color with white color LED light
- Enhanced flexible LED Panel
- 250W powerful lighting
- Flicker-Free
- CRI 95 / TLCI 98 or above
- 0~100% dimming
- Color temperature 2,700°K~6,500°K
- DMX 512 ready with Built-in DMX
- Custom effect / 6 Preset reserve
- USB 5V output / USB Firmware update
- 14.4V and 26V multi support for V mount battery



Model & Kit Component

○ FCC250V

LED Panel	<PN-FCC250>	250W Wide Flexible LED Light Panel
Controller	<CC250V>	Controller for Saturn 250W
Bracket	<YAS028>	X Bracket for Saturn 250W square panel
Ball Head	<BL-LM1600S>	Quick mount ball head with spigot
Cable	<C2503>	3m extension cable for Saturn 250W
Soft Box	<SB-FCA250>	Softbox for Saturn 250W square panel
Adapter	<AC300X>	AC Adapter for Saturn 250W

Specifications



Light Sources	RGBWW Flexible LED Panel
Consumption	250 W
Photometric (lux)	1m:6,024 2m:1,752 3m:875
CRI	95 or above
CCT	2700°K ~ 6500°K
Light Angle	140°
Dimming	0~100%
Power Input	DC 24 V
DMX	512 Channels
Dimensions	Panel: 90x24 cm (35.2x9.5 inch) Controller: 27x17x8 cm (10.5x6.5x3 inch)
Weight	Panel: 0.6 kg (1.3 lb) Controller: 1.8 kg (4 lb)

FLEXIBLE
LED LIGHT



RGBWW full color with white



Enhanced flexible light panel



Controller with built-in battery mount



RGBWW LED Light panel

SATURN120

FULL COLOR FLEXIBLE LED LIGHT **120W**

Highlights

- RGB full color with white color LED light
- Enhanced flexible LED Panel
- 120W powerful lighting
- Flicker-Free
- CRI 95 / TLCI 98 or above
- 0~100% dimming
- Color temperature 2700°K~6500°K
- DMX 512 ready with Built-in DMX
- Custom effect / 6 Preset reserve
- USB 5V output / USB Firmware update



Model & Kit Component

○ FCB120V

LED Panel	<PN-FCB120>	120W Wide Flexible LED Light Panel
Controller	<CC120V>	Controller for Saturn 120W
Bracket	<YAS026>	X Bracket for Saturn 120W
Cable	<C1203>	3m extension cable for Saturn 120W
Soft Diffuser	<LD-FCB120>	Softbox for Saturn 250W square panel
AC Adapter	<AC150M>	Adapter for Saturn 120W

Specifications



Light Sources	RGBWW Flexible LED Panel
Consumption	120 W
Photometric (lux)	1m:2,806 2m:829 3m:381
CRI	95 or above
CCT	2700°K ~ 6500°K
Light Angle	140°
Dimming	0~100%
DC Input	12~24 V
DMX	512 Channels
Dimensions	Panel: 46x24 cm (18.1x9.5 inch) Controller: 18x9x6 cm (7x3.5x2.4 inch)
Weight	Panel: 0.3 kg (0.7 lb) Controller: 0.6 kg (1.4 lb)



1000W Ultra Power Lighting



RGBWW full color with white



Built-in Dedicated Controller



Stable durable body

VENUS1000

ULTRA POWER RGBWW STUDIO LIGHT **1000 W**

Highlights

- 1000W ultra powerful studio light
- RGB full color with white color LED light
- Durable metal body
- Flicker-Free
- CRI 95 / TLCI 98 or above
- 0~100% dimming
- Color temperature 2,700°K~6,500°K
- DMX 512 ready with Built-in DMX
- Custom effect / 6 Preset reserve
- USB 5V output / USB Firmware update



- MCB1000B



Specifications



Light Sources	RGBWW Metal LED Panel
Consumption	1000 W
Photometric (lux)	1m:24,000 2m:7,168 3m:3,500
CRI	95 or above
CCT	2700°K ~ 6500°K
Light Angle	140°
Dimming	0~100%
Power Input	220 V
DMX	512 Channels
Dimensions	100x57x19 cm 39.4x22.4x7.4 inch
Weight	21 kg 46.2 lb


500W
ULTRA POWER



500W Ultra Power Lighting



RGBWW full color with white

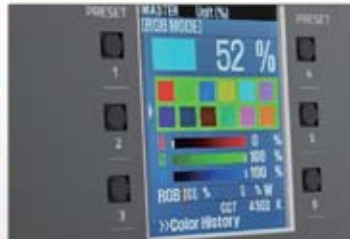

Built-in Dedicated Controller




Stable durable body

VENUS 500


ULTRA POWER RGBWW STUDIO LIGHT **500 W**

Highlights

- 500W ultra powerful studio light
- RGB full color with white color LED light
- Durable metal body
- Flicker-Free
- CRI 95 / TLCI 98 or above
- 0~100% dimming
- Color temperature 2,700°K~6,500°K
- DMX 512 ready with Built-in DMX
- Custom effect / 6 Preset reserve
- USB 5V output / USB Firmware update

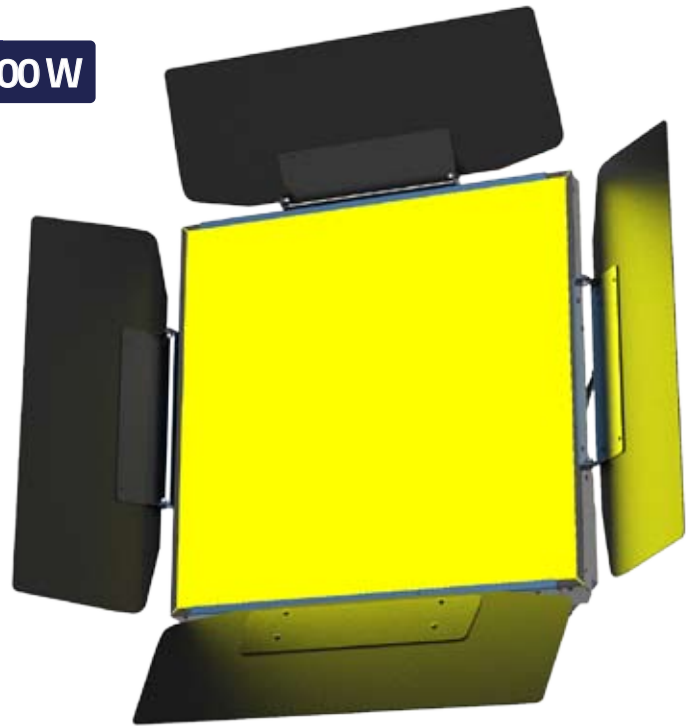

- MCA500B

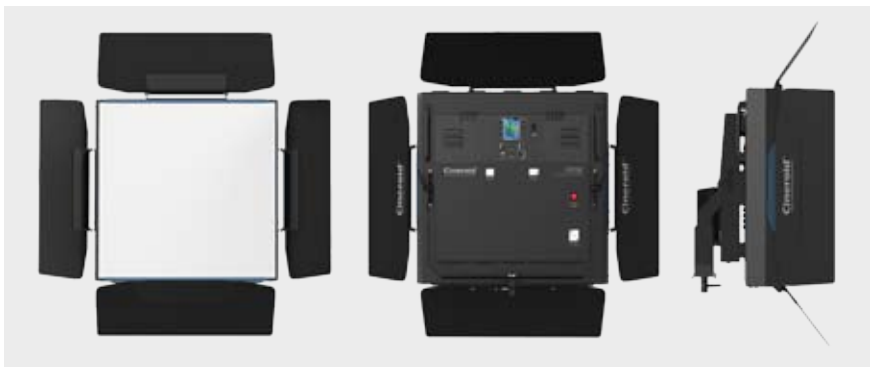

Specifications



Light Sources	RGBWW Metal LED Panel
Consumption	500 W
Photometric (lux)	1m:12,000 2m:3,584 3m:1,756
CRI	95 or above
CCT	2700°K ~ 6500°K
Light Angle	140°
Dimming	0~100%
Power Input	220 V
DMX	512 Channels
Dimensions	53x53x17 cm 20.8x20.8x6.2 inch
Weight	10 kg 22 lb


VENUS 350

ULTRA POWER RGBWW STUDIO LIGHT **350 W**

Highlights

- 350W ultra powerful studio light
- RGB full color with white color LED light
- Durable metal body
- Flicker-Free
- CRI 95 / TLCI 98 or above
- 0~100% dimming
- Color temperature 2,700°K~6,500°K
- DMX 512 ready with Built-in DMX
- Custom effect / 6 Preset reserve
- USB 5V output / USB Firmware update

350W
ULTRA POWER

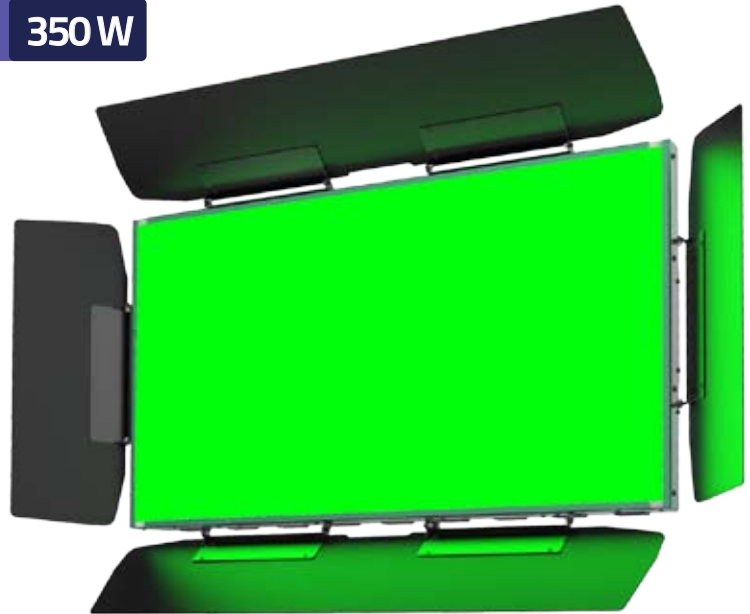

- MCB350B



Specifications



Light Sources	RGBWW Metal LED Panel
Consumption	350 W
Photometric (lux)	1m:9,600 2m:2,867 3m:1,400
CRI	95 or above
CCT	2700°K ~ 6500°K
Light Angle	140°
Dimming	0~100%
Power Input	220 V
DMX	512 Channels
Dimensions	63x34x13 cm 25x14x5 inch
Weight	7.8 kg 17 lb

TL120

CREATOR LIGHT

120W



Highlights

- 40W LED Light Panel X3
- Built-in Foldable Softbox
- 3 channel Dedicated Controller
- Color temperature 2700°K~6500°K
- Durable Metal Body
- CRI 95 / TLCI 98 or above
- 0~100% dimming
- Sleep Mode
- Flicker-Free
- 2 Types of ball-heads provided



3 Channel Lighting Set



Built-in Foldable Softbox



3 Channel Controller

Model & Kit Component

- TL120 * Optional V mount battery plate available <BH-TL120V> 

LED Panel X3	<PN-TL120>	40W LED Light Panel with Built-in Softbox
Controller	<CB-TL120>	Controller for 3 Channel LED Light TL120
Ball Head with Clamp X2	<QAC023>	Mini Ball-Head with Clamp
Ball Head for Tripod X2	<XLL044>	16mm spigot with ballhead
5M Cable X 3	<FCB066>	5 meter RJ45 Cable
Bag	<QBG008>	Carrying Bag for TL120

Specifications



Light Sources	Bi-Color LED Panel
Consumption	120 W (40W per each panel)
Dimension	LED Panel : 300 x 200 x 120 mm
	Controller: 118 x 17 x 40 mm
Weight	LED Panel : 400 g
	Controller: 185 g
Photometric (lux)	950 / 1 m (per each panel)
Light Angle	130°
CCT	2700°K ~ 6500°K
CRI	95 or above
TLCI	98 or above
Dimming	0~100%
DC Input	12~24 V, Min 120 W

LS1600i

COMPACT STUDIO LIGHT

240W



Slim Studio LED Light 15cm in height

Highlights

- Tungsten to Daylight Bi-Color LED light
- Durable Metal LED Panel with Barndoor
- 240W powerful lighting
- Flicker-Free
- CRI 95 / TLCI 98 or above
- 0~100% dimming
- Built-in controller in body
- Color temperature 2700°K~6500°K
- Silent Cooling System
- DMX 512 ready with Built-in DMX



Model & Kit Component

○ LS1600i

LS1600i Main body

Power Cable

Barndoor

Diffuser

Yoke



Specifications



Light Sources	Bi-Color LED Panel
Consumption	240 W
Photometric (lux)	1m:5,792 2m:1,612 3m:770
CRI	95 or above
CCT	2700°K ~ 6500°K
Light Angle	140°
Dimming	0~100%
Power Input	AC 100~240 V / DC 24 V
DMX	512 Channels
Dimensions	65x15x3.5 cm (25.6x5.9x1.4 inch)
Weight	3 kg (6.6 lb)

LS800i

COMPACT STUDIO LIGHT

120W



Slim Studio LED Light 15cm in height

Highlights

- Tungsten to Daylight Bi-Color LED light
- Durable Metal LED Panel with Barndoor
- 120W powerful lighting
- Flicker-Free
- CRI 95 / TLCI 98 or above
- 0~100% dimming
- Built-in controller in body
- Color temperature 2700°K~6500°K
- Silent Cooling System
- DMX 512 ready with Built-in DMX



Model & Kit Component

○ LS800i


LS800i Main body

Power Cable

Barndoor

Diffuser

Yoke

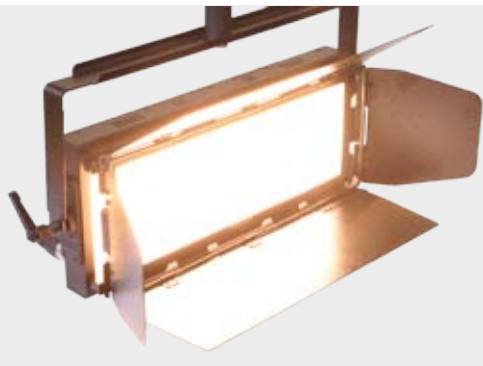

Specifications



Light Sources	Bi-Color LED Panel
Consumption	120 W
Photometric (lux)	1m:2,943 2m:860 3m:410
CRI	95 or above
CCT	2700°K ~ 6500°K
Light Angle	140°
Dimming	0~100%
Power Input	AC 100~240 V / DC 24 V
DMX	512 Channels
Dimensions	36x15x3.5 cm (14.1x6x1.4 inch)
Weight	1.6 kg (3.5 lb)

DB001U

DMX BRIDGE



Highlights

- Powered by USB
- USB A type 5V output
- XLR 5pin DMX port
- DMX512 signal compatible
- RJ45 Jack DMX port
- Durable metal case



Multiple Cineroid lights installed in the studio



DMX Bridge connected to computer for lighting control

Model & Kit Component

- DB001U
 - DMX bridge body
 - USB C cable
 - Manual
 - Uni-Studio software
- Compatibility Cineroid Light
 - CFL Series: CFL250, CFL800, CFL400
 - FL Series: FL250, FL800, FL800
 - Studio Light: CML250, ML250
 - STD250C, STD250
 - LS1600i, LS800i
 - Par Light: PL120V

Specifications


Output signal	DMX512
Dimension	11.5x10x4 cm(4.5x4x1.5 inch)
Weight	250 g (0.6 lb)
DMX port	XLR 5pin and RJ45 jack
Power input	5 V
USB connector	C type
USB power output	5 V



UNI STUDIO

CINEROID INTEGRATED LIGHTING CONTROL SOFTWARE

UNI STUDIO is an integrated control software that allows computer control of Cineroid lighting equipment. Set the channel with Cineroid's DMX feature. Control multiple Cineroid lighting units quickly and easily while viewing the screen on a PC monitor instead of a DMX encoder. This program is used in conjunction with Cineroid Bridge.

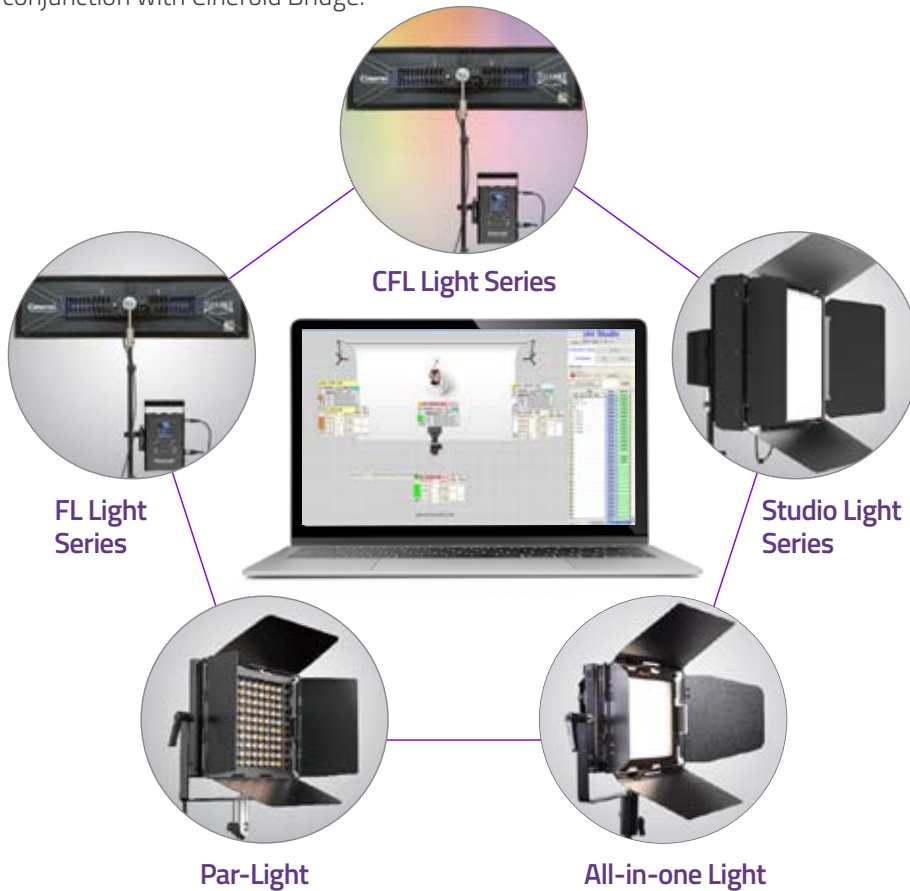

- Control all lights on your finger
- Random colour effect
- Special effect with customizing function
- Data pre-set and recall
- Project base configuration



Control Lights group



Special effect programming and run




Random play

This software only runs on Windows. You can get it by accessing the CINEROID website. Mac and mobile versions will be developed later.

www.cineroid.com

GraV dongle

Cineroid Wireless Lighting Control

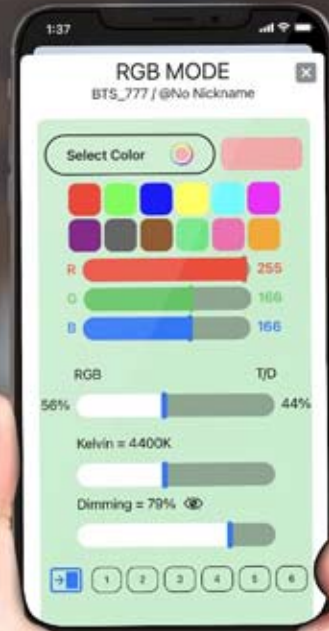

Get Started on **Cineroid**® App



It can be used to control some lighting products CINEROID using the cineroid application. It connects by bluetooth. The Cineroid app provides product information, documentation, and more. You can download it from Google Play for Android and the App Store for iPhone.



ACCESSORIES

Softbox



SB-RCA1000 : Softbox for Jupiter1000



SB-RCC500
Softbox for Jupiter1000



SB-FCA250
Softbox for Jupiter250 or
Saturn250 Square



SB-FCC250
Softbox for Saturn250 Wide



SB-FCB120
Softbox for Jupiter120 or Saturn120

Grid Box



GD-RCA1000 : Grid for Jupiter1000



SB-RCC500
Grid for Jupiter1000



GD-FCA250
Grid for Jupiter250 or
Saturn250 Square



GD-FCC250
Softbox for Saturn250 Wide



GD-FCB120
Softbox for Jupiter120 or Saturn120

ACCESSORIES

Extension Cable



C5003 : 3m extension cable for Jupiter1000 / 500



C2503
: 3m extension cable for
Jupiter250 or Saturn250



C2503
: 3m extension cable for
Jupiter120 or Saturn120

Snap-in Clamp



YAS033 : Snap-in mount with spuer clamp



YAS032 : Snap-in mount with small clamp

ACCESSORIES

Ball Head



XLL044 : Mini Ballhead with 16mm Spigot



BL-LM1600S : Ball head for LM1600 with 16mm spigot

Carrying Bag



QBG021
Carrying bag for Jupiter 500/1000
Dimensions : 62 x 25 x 35 cm / Weight : 1.4 kg



QBG004
Dimensions : 33 x 19 x 23 cm
Weight : 765 g



QBG008
Dimensions : 36 x 18 x 32 cm
Weight : 995 g



QBG015
Dimensions : 36 x 18 x 32 cm
Weight : 995 g



QBG011
Dimensions : 34 x 33 x 9 cm
Weight : 750 g



QBG012
Dimensions : 34 x 33 x 9 cm
Weight : 750 g



QBG009
Dimensions : 50 x 31 x 28 cm
Weight : 1.6 kg

Cineroid[®]

Cinema & Broadcasting Equipment

(주)시큐라인

Tel. (070)4347.4901 Fax. (070)4347.4999 E-mail. support@secu-line.com

(우)08381 서울특별시 구로구 디지털로 271 벽산디지털밸리 3차 203호

SECULINE CO., Ltd

Tel. +82.70.4347.4901 Fax. +82.70.4347.4999 E-mail. support@secu-line.com

Room 203, Byucksan digital vally 3rd, 271, Digital-ro,

Guro-gu, Seoul, Republic of Korea 08381

